

Data Sheet Recessed Cap

Release date : 23.06.2011

Product range : 6" - 20"

Product code : RCAP

Commodity / HS code : 39235090

Elskensakker 8, NL-5571 SK
Bergeijk, The Netherlands

Tel +31 497 542527

Fax +31 497 555399

Email info@dhatec.nl

Web www.dhatec.nl

Application:

The recessed cap is suitable for hook lifting and protects the internal pipe surface against penetration from water, dirt and dust. In combination with **Desiccant Bags*, the interior of the pipe is also protected against corrosion.

5 reasons to buy this product:

1. Fast and easy fitting and removal
2. Suitable for hook lifting
3. Low priced solution for smaller diameters
4. High UV-stability
5. *Desiccant Bags* can be added to condition the moisture level inside the pipe.

Function:

The recessed cap is placed over the pipe-end and clamps on the external surface of the pipe. The recessed cap is available for every standard diameter within abovementioned range.

Material qualities:

Material : LDPE
Elasticity at break : 650 %
Tension at break : 20 Mpa
Modulus of elasticity : 300 Mpa
Material thickness : ± 3 mm (extra protection in the front)
Depth : ± 90 mm

Additional information:

- Application temperature: -30 °C / +60 °C
- UV-resistance: Suitable for medium term outdoor use: 0,5-2 years
- Application time: < 1 minute per pipe-end
- We can advise you about pipe storage in all climates.
Ask for the possibilities.

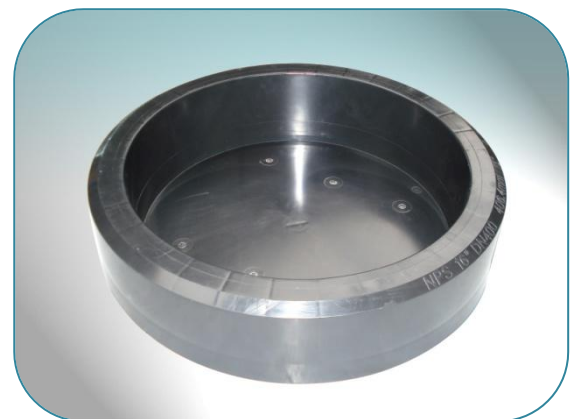


Fig 1: Recessed Cap



Fig 2: Pipe with Recessed Cap